

# 205U Ductile Iron UL/FM Gate Valve • Spec Sheet




## FEATURES & BENEFITS

- Flanged Ends - Conforms with ANSI B16.1 Class 125
- Resilient Wedge
- AWWA C515 & UL/FM Approved
- Fusion Epoxy Coated - AWWA C550
- 300 PSI
- Rising Stem (OS&Y)
- 4 Bosses - 1 Tapped with Plug
  - 3" & 4" - 1/2" Brass Plug
  - 6" & Up - 3/4" Brass Plug
- Sizes 2-1/2" – 12"

## DIMENSIONS

Part #	Size	L	H (Open)	H (Closed)	D
205U09	2-1/2"	7-1/2	16-5/8	13-3/4	7-1/4
205U10	3"	8	18-7/8	15-3/4	10
205U11	4"	9	21-5/8	17-3/7	10
205U13	6"	10-1/2	25-4/5	20-7/8	12
205U14	8"	11-1/2	36-5/8	28-3/4	14
205U15	10"	13	44-1/2	34-3/4	17-1/2
205U16	12"	14	52	40-1/6	17-1/2

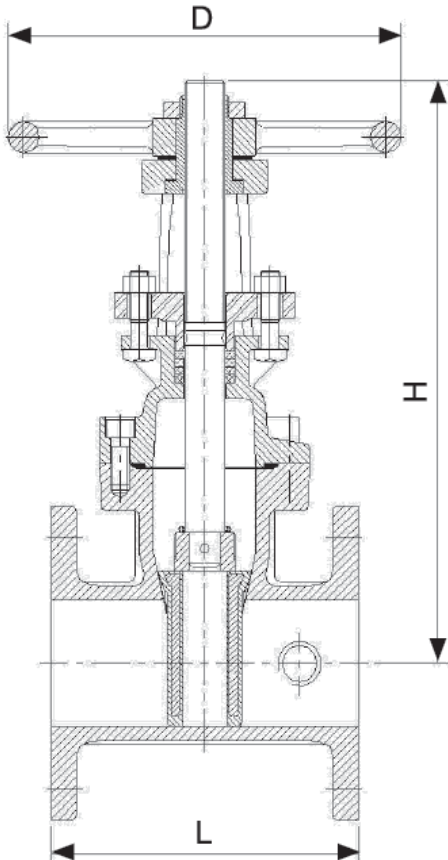

## MATERIAL SPECIFICATIONS

Part	Material
Body	Ductile Iron A536 65-45-12
Wedge	Ductile Iron, EPDM Encapsulated
Wedge Nut	Stainless Steel AISI 304
Stem	Stainless Steel AISI 420
Bonnet	Ductile Iron A536 65-45-12
Gasket	EPDM
Packing	Graphite
Gland	Ductile Iron A536 65-45-12
Yoke Nut	Bronze ASTM B62
Handwheel	Ductile Iron A536 65-45-12
Handwheel Nut	Ductile Iron A536 65-45-12
Plug	Malleable Iron
Gland Bolts	Stainless Steel AISI 316
Bonnet Bolts	Carbon Steel A307 B

 **MATCO-NORCA**  
 Global sourcing. National compliance. Local service.

**CALIFORNIA** 5593 Fresca Dr., La Palma CA 90623 • Toll Free: 866-532-8306 • Fax: 866-532-8307  
**TEXAS** 1150 Silber Rd., Houston TX 77055 • Toll Free: 800-935-5456 • Fax: 713-680-2999  
**NEW YORK** PO Box 27, Rt. 22, Brewster NY 10509 • Toll Free: 800-431-2082 • Fax: 845-278-9056  
 WEB: [www.matco-norca.com](http://www.matco-norca.com) EMAIL: [mail@matco-norca.com](mailto:mail@matco-norca.com)