ThermOmegaTech[®]


SS WASHDOWN GUN

ADJUSTABLE SPRAY PATTERN NOZZLE

DESIGN FEATURES

- Rated at 350 PSI (24 bar)
- Maximum working temperature of 200°F (95°C)
- Adjustable cone spray angle from 0° to 60°
- Weighs 2 lbs. (0.9 kg)
- Accepts 1/2" male NPT connections
- Positive shutoff
- SS body and handle

FLOW RATE - PRESSURE (STRAIGHT NOZZLE)

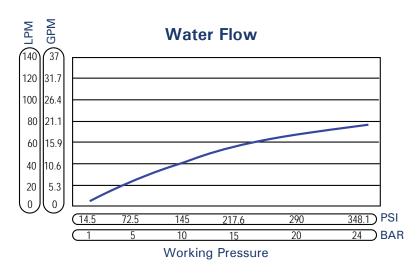

ORDERING

Part Number	Description
941-510100-000	SS Washdown Spray Gun



ThermOmegaTech[®], Inc. 353 Ivyland Road Warminster, PA 18974 University of the second stress of the second stress

SS Washdown Gun 6/16/2021

Because of continuous improvements, ThermOmegaTech®, Inc. reserves the right to change the design and specifications without notice