

# 143XU

Cast Steel Globe Valve

Class 150

## Features & Benefits

- Ideal for throttling service
- Flow characteristics permit accurate and repeatable flow control
- Seat ring is seal welded to eliminate leak paths
- Outside screw & yoke
- Bolted bonnet


## Materials

PART	MATERIAL
Body	A216 WCB
Bonnet	A216 WCB
Seat Rings	Hardfaced
Disc	13% CR Overlay
Stem	410 SS
Packing	Graphite
Bonnet Gasket	Soft Iron
Back Seat	410 SS
Disc Stem Nut	410 SS
Disc Washer	Carbon Steel
Gland	410 SS
Gland Flange	WCB
Eye Bolt	Steel
Eye Bolt Nuts	A563 Gr. A or O
Pins	-
Bonnet Studs	A193 Gr. B7
Bonnet Nuts	A194 Gr. 2H
Handwheel	WCB
Handwheel Nut	A194 Gr. 2H
ID Tags	SS
ID Pins	Steel



143XU

## Dimensional Drawing

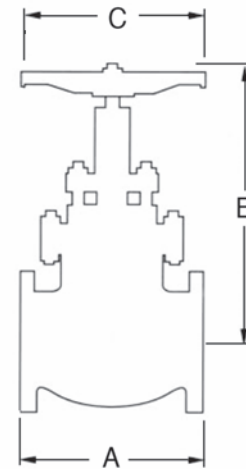

## Dimensions & Weights

SIZE (inch)	WEIGHT (lbs)	A (inch)	B VALVE OPEN (inch)	C (inch)
2	53	8.00	14.00	8.00
2 1/2	70	8.50	15.00	8.00
3	90	9.50	17.00	10.00
4	143	11.50	20.00	12.00
6	246	16.50	24.00	16.00
8	392	19.50	25.00	16.00
10	605	24.50	29.00	20.00
12	900	27.50	38.00	20.00

## Industry Standards

STEEL VALVES	ANSI B16.34
FACE-TO-FACE/END-TO-END	ANSI B16.10
FLANGE DIMENSIONS	ANSI B16.5
TESTING	API 598
ACCEPTANCE	API RP591

Intermediate pressure ratings shall be determined by interpolation.

**SIZE RANGE:** 2 - 12 inches **PRESSURE TEMPERATURE RATING:** Class 150

Carbon Steel  
ASTM A216 Grade WCB  
285 psi @ -20°F to 100°F

Valid as of 01/04/12

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.